



1.Remove screws of radiator display screen in the mark red position.




2.Remove the mark red position screws, take off the display screen and acrylic gasket(stay it and mount it on the other side bracket).



3.Remove the screws of radiator in the other side bracket in the mark red position.



4.Mount the screws in the red position as shown, mount the display screen and acrylic gasket well according to the direction of the picture.

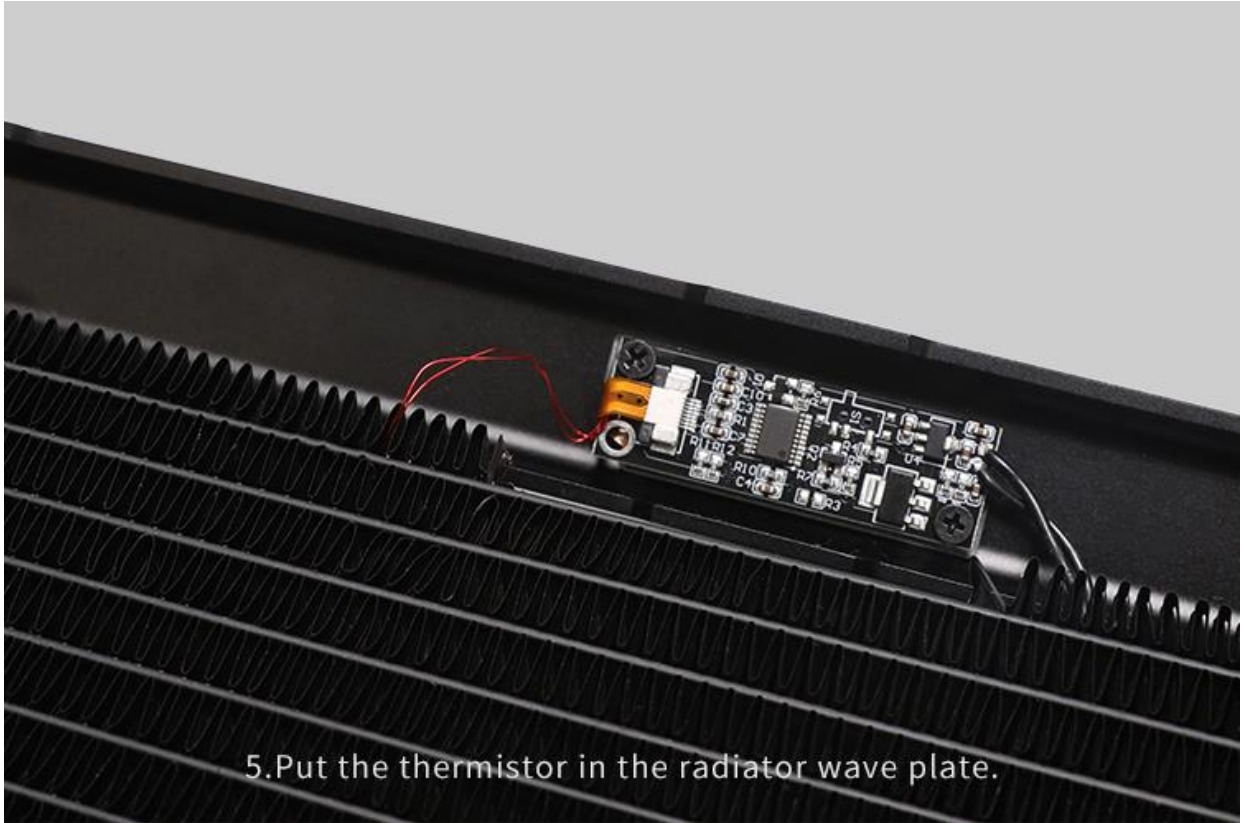

5.Put the thermistor in the radiator wave plate.



6.As shown, mount the one side bracket of radiator well.

The second method: Replace the radiator bracket position


Exchange radiator bracket on the both side



1. Remove screws of radiator display screen in the mark red position.



2. Remove the screws of radiator in the other side bracket in the mark red position.

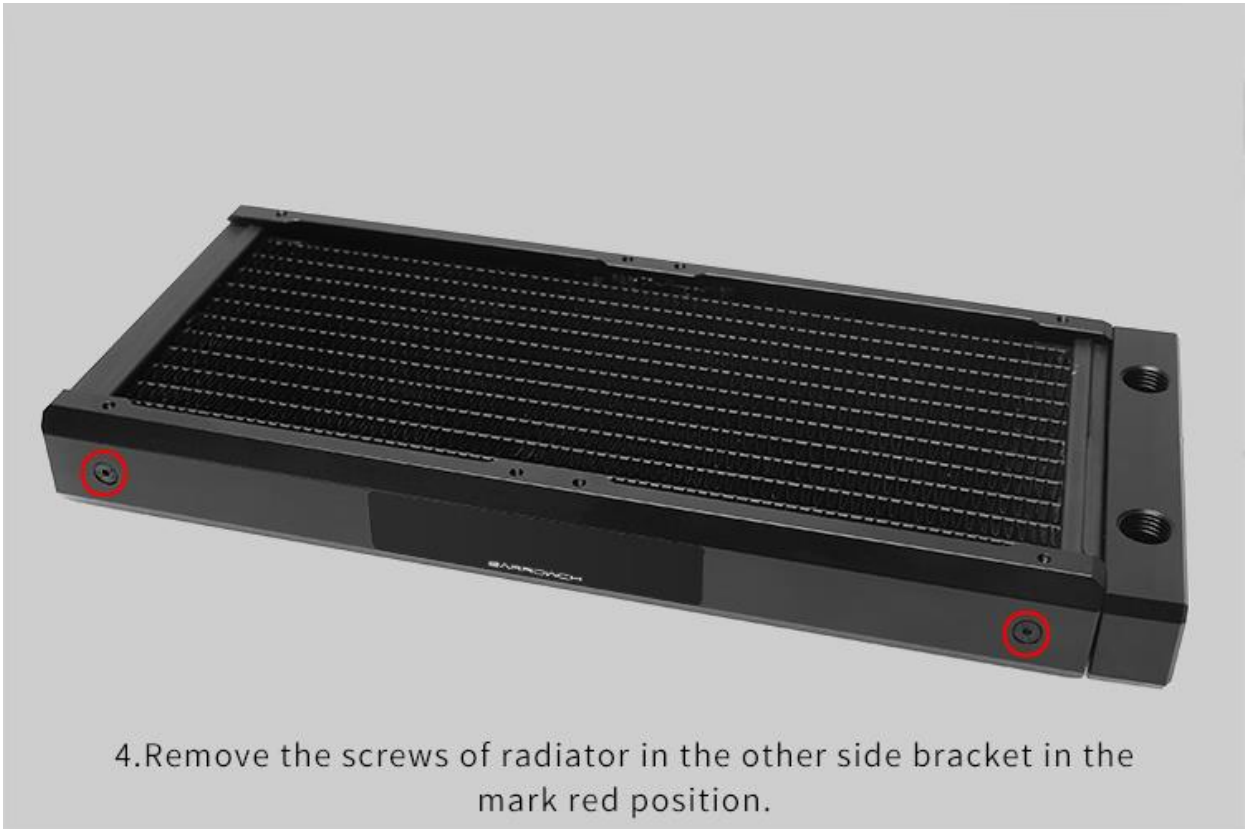

Purchase information

购买须知

1. The display direction of screen can be adjusted according to needs, when fix the bracket, tighten the screw, do not use too much force;
2. Please mount the bracket in the original direction, do not exchange the head and tail, If it is installed reversely, will find that the hole position is uneven, so the screw cannot be installed normally;
3. The interface type: 2510-3PIN power supply interface, insert power supply interface in motherboard fans interface;
4. After installation and before first electrifying, please set up the motherboard BIOS corresponding fan interface to 'full speed' to keep the voltage as stable 12V output to avoid the equipment damage or abnormal due to low voltage;
5. The display screen is made of fragile material, do not press hard;
6. In case product appearance upgrade, without further notice, prevail in kind.